


OMEGA Nail-Seal Tape

A bitumen tape, adhesive on one or both sides, that is attached along the full length between the diffusive roof underlay and the counter-batten. It prevents ingress of rainwater and guarantees optimum wind-tightness of the construction. Tested for protection from rain by the Austrian Wood Research Association, (Holzforschung Austria Order no. 203/2003/2 T/HH)

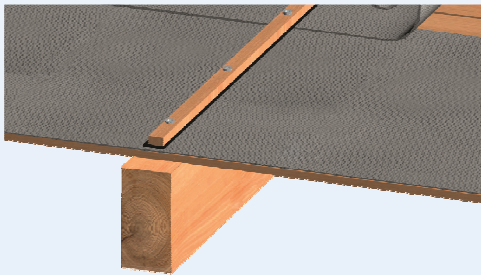

FIELD OF APPLICATION:

Nail seal for roof underlays

PRODUCT DATA :

Composition:	self-adhesive bitumen tape		
Working temperature:	from + 5°C		
Temperature resistance:	- 40°C to + 100°C		
Storability:	1 year (cool and dry)		
Thickness:	2 mm		
Roll length:	10 m		

Adhesive one side:

Roll width:	50 mm	60 mm	80 mm
Rolls / carton:	20	16	12

Adhesive both sides DSK:

Roll width:	50 mm	60 mm
Rolls / carton:	6	6

In accordance with ÖNORM B 4119 a nail-seal tape with a width of minimum 50mm must be used.

APPLICATION:

Attach **OMEGA Nail Seal Tape** to the roof sheeting directly beneath the counter-batten. The sealing tape encloses the nail completely and achieves a **100% sealed** penetration point!

See Guidelines for OMEGA Roof Underlay.

The standards according to ÖNORM B 4119 and/or ZVDH (Central Association of German Roofers) must be observed.

01.2013/ BP/CN

www.isocell.at Info- Tel.: +43 (0) 6216 / 4108